



Modular design lets you join centers together to fit your space and application.

EcoPolyBlend™ Accumulation Centers and Ramp

Combine units to create your own customized spill-control system

Low-profile centers only measure 5.5-inches (140-mm) high for easy handling of drums. Made with 100% recycled polyethylene, these accumulation centers are nearly impervious to chemicals, including acids and corrosives. Seamless construction eliminates leaks, making them ideal for drum filling and dispensing operations. Self-locating grates won't ride-up, and are removable for easy cleaning. Combine 2-, 4-, 6-, and 8-drum modular units to create your own customized system. Use the optional joining clips to firmly lock units together. Sumps remain separate and clips can be removed for easy repositioning. Also available in non-recycled yellow color.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.

Use optional Sump-to-Sump™ drain kit (includes joining clips and transfer tube) for applications requiring a continuous sump. Kit allows you to join centers together, on-site, for full compliance with regulations when sump capacities reach 71-gallons (270-liters). Kit includes one pair stainless steel joining clips, one pair rubber grommets, one polytetrafluoroethylene (PTFE) transfer tube. (Patent No US 6,622,879,B1)

Companion Ramp

Load and unload heavy drum with ease. Anti-skid ribs provide maximum safety. Place the ramp anywhere on accumulation centers size 2-drum or larger.



- 3 - 28655 2-Drum Unit
- 1 - 28687 Ramp
- 2 - 28927 Sump-to-Sump™ Drain Kits



28659



28652



Black models - 100% recycled content.
Independently green validated by UL Environment.

Yellow models have 45% recycled content

Build your own customized system!

123 in (3124 mm)

49 in (1245 mm)

58 in (1473 mm)

28655 2-Drum Unit 22-Gal (90-L)	28655 2-Drum Unit 22-Gal (90-L)	28655 2-Drum Unit 22-Gal (90-L)
Total 71-Gal (270-L) Sump Capacity meets US EPA and UFC codes		28687 Accumulation Center Ramp



Description	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
1 drum center	12/45	1250/567	25 x 25 x 5.5 in 635 x 635 x 140 mm	—	28653	28652	17/8
2 drum center	24/90	2500/1134	49 x 25 x 5.5 in 1245 x 635 x 140 mm		28655	28654	32/15
4 drum center	49/185	5000/2268	49 x 49 x 5.5 in 1245 x 1245 x 140 mm		28657	28656	61/28
6 drum center	73/276	7500/3402	73 x 49 x 5.5 in 1854 x 1245 x 140 mm	E,S,O	28659	28658	91/41
8 drum center	98/371	10,000/4536	97 x 49 x 5.5 in 2464 x 1245 x 140 mm		28661	28660	122/55
Ramp for above	—	1000/455	48 x 33 x 6.25 in 1219 x 838 x 159 mm	—	28687	28650	41/19
Joining clips, one pair, stainless steel	—	—	4 x 2 in 102 x 51 mm	—	28926	—	1/0.5
Sump-to-Sump™ drain kit	—	—	—	—	28927	—	—

EcoPolyBlend™ Replacement Grates (100% recycled)

2 drum grate for all sizes except 1 drum	24 x 48 x 2.5 in 610 x 1219 x 63 mm	—	28259	—	16/7
1 drum grate for 1 drum unit and 3 drum In-line	24 x 24 x 2.5 in 610 x 610 x 63 mm	—	28260	—	8/4

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

EcoPolyBlend™ Spill Control Pallets

Keep workers safe from accidental slips indoors and avoid costly hazmat cleanup costs

- Protect against ground contamination.
- Comply with EPA and avoid potential fines.

Made of molded 100% recycled polyethylene, these pallets resist chemical attack from hazardous acids, caustics and solvents. The oversized sump holds the contents of up to a 55-gallon (200-liter) drum in the event of leak or rupture—meeting or exceeding the most stringent spill containment regulations. Seamless construction eliminates leaks. Self-locating grates lift off for quick cleanup. Black color hides grime and dirt to keep your workplace looking clean. Choose from square or in-line configurations. Also available in non-recycled yellow color.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



Use pallet as a workstation for waste collection.



Black models - 100% recycled content.
Independently green validated
by UL Environment.

Yellow models have 45% recycled content



Description	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
2 drum in-line pallet	66/250	2500/1134	49 x 25 x 18 in	E,S,0	28623	28622	44/20
2 drum in-line pallet w/drain			1245 x 635 x 457 mm		28625	28624	
3 drum in-line pallet	75/284	3750/1701	73 x 25 x 11.625 in		28627	28626	58/26
3 drum in-line pallet w/drain			1854 x 635 x 295 mm		28629	28628	
4 drum in-line pallet	75/284	5000/2268	97 x 25 x 9 in		28631	28630	77/35
4 drum in-line pallet w/drain			2464 x 635 x 229 mm		28633	28632	
4 drum square pallet	73/276	5000/2268	49 x 49 x 10.25 in		28635	28634	70/32
4 drum square pallet w/drain			1245 x 1245 x 260 mm		28637	28636	
Ramp for 28635	—	1000/454	49 x 33 x 10.50 in 1245 x 838 x 267 mm	—	28688	28620	40/18

EcoPolyBlend™ Replacement Grates (100% recycled)

2 drum grate for all sizes above	24 x 48 x 2.5 in 610 x 1219 x 63 mm	—	28259	—	16/7
1 drum grate for 3 drum In-line	24 x 24 x 2.5 in 610 x 610 x 63 mm		28260		8/4

*Service temperature range: -30°F to 120°F (-34°C to 49°C)



Easily roll drums into a DrumShed™ for storage.

EcoPolyBlend™ DrumSheds™

Safe, secure, and compliant outdoor storage for drums

Weather resistant DrumSheds™ are made of eco-friendly, 50% recycled polyethylene. Convenient roll top doors allow access from front or rear. A wide, 52-inch (1321-mm) door opening accepts palletized loads. Fully compliant, leakproof pallet sump has removable, durable deck grating for easy cleanup of spills. A spacious interior offers ample headroom for adding funnels or pumps. Safety features include grounding capability, integral anchor bolt locations for wind resistance, and molded lugs to accept padlocks for security. Forklift pockets at the front and back make it easy to relocate empty sheds. Ships fully assembled. Pallets (without shed) also available.

Low Line Pallets (without shed) also available. Two-drum and 4-drum sizes feature ergonomic, low 9-in (229-mm) working height.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



Independently green validated by UL Environment.



Description	Recycled Content	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
2 drum DrumShed™	50%	67/254	2500/1134	60.75 x 58.50 x 75.25 in 1543 x 1486 x 1911 mm	E,S,O	28675	292/133
4 drum DrumShed™		79/301	5000/2268	60.75 x 68.50 x 75.25 in 1543 x 1740 x 1911 mm		28676	343/156
Ramp	100% - Black 0% - Yellow	—	1000/455	48 x 59.75 x 11.25 in 1219 x 1518 x 286 mm	—	28679 -Black 28678 -Yellow	65/30
Low Line Pallet - 2 drum	100%	67/254	2500/1134	55 x 45 x 9 in 1397 x 1143 x 229 mm	E,S,O	28672	68/31
Low Line Pallet - 4 drum		79/301	5000/2268	55 x 55 x 9 in 1397 x 1397 x 229 mm		28673	89/40

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

Steel Spill Containment Pallets

Use rugged, high sump capacity pallets for industrial applications

Constructed of 11-gauge hot rolled steel and strengthened with formed edging, these rugged pallets feature generous sump capacities and are 100% leakproof. Galvanized steel bar grating removes for easy cleaning and keeps drums out of overflow. Large forklift pockets 8.375-in W x 3.875-in H (213-mm W x 98-mm H) make relocation easy. Available in corrosion resistant blue powder-coat or galvanized steel finishes.

Description	Sump Capacity Gallons/Liters	Load-bearing Capacity lb/kg	External Dim. W x D x H	Compliance	Blue Model No	Galvanized Model No	Ship Wt lb/kg
2 drum pallet	72/273	1200/544	47.25 x 37.50 x 16.3125 in 1200 x 800 x 414 mm	E,S,O,I,A	28610	28611	165/75
4 drum in-line pallet	102/386	2400/1089	94.125 x 31.50 x 13.0625 in 2391 x 800 x 332 mm		28612	28613	305/138
4 drum square pallet	77/291	2400/1089	47.25 x 47.25 x 13.0625 in 1200 x 1200 x 332 mm		28614	28615	215/98



*See page 2 for Compliance Key

EcoPolyBlend™ IBC Pallet and IBC Shed

Reliable spill protection and safe storage for IBCs

- Compliant storage for popular 275- or 330-gal (1000- or 1250-liter) IBCs.
- Compact footprint with ergonomic working height.

Constructed of durable 40% recycled polyethylene, these intermediate bulk container pallets offer excellent chemical resistance. Accepts IBCs up to 48-in W x 48-in D x 53-in H (1219-mm W x 1219-mm D x 1346-mm H). Large leakproof sump exceeds regulations and protects against high volume spills. Sturdy pillar supports accept up to 9,000-lb (4082-kg) uniformly distributed load. Removable pillars make for easy sump cleanup. Pallet features forklift pockets for relocation when empty. Ships fully assembled.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



Outdoor design features lockable, dual-access roll-top doors and includes reach pole for easy closure.



Independently green validated by UL Environment.



28674



28674



Description	Recycled Content	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
IBC indoor pallet	40%	372/1408	9000/4082	55 x 55 x 37.50 in 1397 x 1397 x 952 mm	E,S,0	28674	357/162
IBC outdoor shed w/pallet				60.75 x 68.50 x 103.75 in 1543 x 1740 x 2635 mm		28677	621/282
Replacement Reach Pole				1.125 dia x 60 in L 28 dia x 1524 mm L	—	28690	3/2

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

EcoPolyBlend™ Spill Trays


Lightweight and low-profile design for small-scale spill control

Made of 100% recycled polyethylene, these eco-friendly spill trays will not rust or corrode. Raised rib bottom adds rigidity and keeps contents out of spills—perfect for pouring and filling applications. Rated for service temperatures between -30° to 120°F (-34 to 49°C).

Sump Capacity Gallons/Liters	External Dim. W x D x H	Nominal Interior Dim W x D x H	Model No	Ship Wt lb/kg
12/45	46 x 16 x 5.50 in 1168 x 406 x 140 mm	40.375 x 10.375 x 4.875 in 1026 x 264 x 124 mm	28715	4/2
20/75	38 x 26 x 5.50 in 965 x 660 x 140 mm	32.375 x 20.375 x 4.875 in 822 x 518 x 124 mm	28716	5/2
	47.50 x 23 x 5.50 in 1207 x 584 x 140 mm	41.875 x 17.375 x 4.875 in 1064 x 441 x 124 mm	28717	6/3
23/87	37.75 x 34 x 5.50 in 959 x 864 x 140 mm	31.875 x 28.375 x 4.875 in 810 x 721 x 124 mm	28718	
29/109	47 x 33 x 5.50 in 1194 x 838 x 140 mm	41.375 x 27.375 x 4.875 in 1051 x 695 x 124 mm	28719	8/3



28718

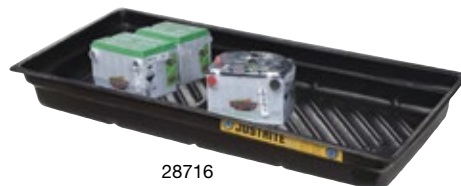

28716



28719



*See page 2 for Compliance Key



Two-wheeled design makes for easy transport.


EcoPolyBlend™ Spill Containment Caddy

Get convenient handling, dispensing and built-in spill containment—all in one product!

- Rubber, 10-in (254-mm) wheels roll over bumpy terrain—use indoors or out.
- Single-piece, double-walled seamless design eliminates leaks.

This portable unit with wheels allows one person to easily transport a full 55-gallon (200-liter) drum. Ergonomic design with tilt/stop feature minimizes back strain. Two tension straps hold a drum securely in place. A 66-gallon (250-liter) spill sump contains chemical spills, eliminating hazards and hassles. Exclusive open-view sump design makes cleanup simple and quick. Durable 90% recycled polyethylene construction provides maximum corrosion resistance and leakproof protection. Also, available in non-recycled yellow color.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.

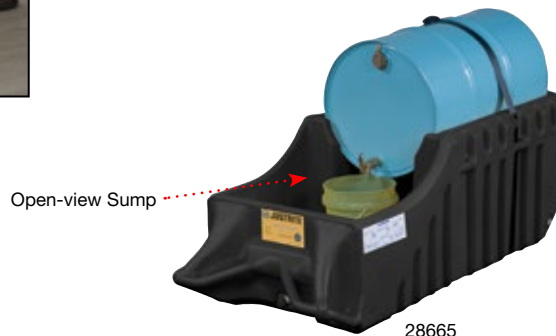

Black models - 90% recycled content.
Independently green validated
by UL Environment.

Yellow models have no recycled content



Description	Sump Capacity Gallon/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
Indoor/outdoor caddy	66/250	1250/567	32 x 72 x 26 in 813 x 1829 x 660 mm	E,S,0	28665	28664	125/57

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

EcoPolyBlend™ Spill Control Funnels

An eco-friendly, cost-effective way to collect liquids and keep drum tops clean

Use these funnels with any closed-head 30- and 55-gallon (110- and 200-liter) drums. Low-profile, wide diameter opening makes it for quick, easy pouring. Scalloped, sloped design minimizes splashes and prevents containers from resting in their own liquids. Large, flat well at the throat of funnel allows for passive draining of paint tins, filters, buckets and other containers.

Funnel for flammable liquids includes a drum fill vent with brass flame arrester, threaded bung cap with tight seal, and pressure relief valve for high temperatures. Molded-in hook stores optional funnel cover.



Wide diameter opening allows for quick and easy pouring.

Description	Sump Capacity Gallons/Liters	OD x H	Compliance	Model No	Ship Wt lb/kg
Funnel for nonflammables	2.50/9	21 x 3.25 in 533 x 83 mm	0	28680	5/2
Funnel for flammables		19 x 3.25 in 482 x 83 mm	—	28681	7/3
Cover for funnel 28680		—	—	28682	5/2



100% recycled content.
Independently green validated
by UL Environment.

EcoPolyBlend™ Drum Management System

Organize drums for maximum efficiency, productivity and cost-savings

Space-saving, stackable design stores up to four 30- and/or 55-gallon (110- and/or 200-liter) drums of Class 1B or 1C flammables and combustibles or nonhazardous liquids. 100% recycled molded polyethylene construction provides maximum chemical resistance—preventing corrosion, deterioration and leaks. Molded-in drum lock-channels hold drums in place. The system consists of three parts: a base module, stack module and dispensing shelf.

The Base Module holds two drums with a 3060-lb (1388-kg) total load capacity. Easily relocate the base module with a forklift when empty. The 66-gallon (250-liter) open-view containment sump makes it easy to spot any spills for a quick cleanup.

The Stack Module holds two additional drums to double the system capacity for a load of 1500-lb (680-kg). When storing both 30- and 55-gallon (110- and 200-liter) drums, the smaller drums should be placed on the top of the stack module.

The Dispensing Shelf has a load capacity of 60-lb (27-kg), and mounts securely to the stack module for convenient dispensing from the upper level.

EPA compliant, supports SPCC, and meets fire codes.



EcoPolyBlend™ drum management system combines efficient drum storage and positive spill control.



28667 Base



28667 Base • 28669 Stacker with strap • 28671 Shelf



Black models - 100% recycled content. Independently green validated by UL Environment.

Yellow models have no recycled content



Drum vents provide pressure relief . . .

Whether storing drums horizontally or vertically, Justrite has the solution for safely relieving dangerous drum pressure—visit justritemfg.com for details.



Description	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
Base module	66/250	3060/1388	49 x 59 x 26 in 1245 x 1499 x 660 mm	E,S,0	28667	28666	138/63
Stack module	—	1500/680	49 x 46 x 12 in 1245 x 1168 x 305 mm	—	28669	28668	70/32
Dispensing shelf	—	60/27	19.50 x 18.75 x 16.50 in 495 x 476 x 419 mm	—	28671	—	12/5

*Service temperature range: -30°F to 120°F (-34°C to 49°C)



Durable construction withstands the rigors of transportation.

Overpack/Salvage Drums

Approved for the transportation of hazardous materials

- Polyethylene drums are DOT/UN certified to the highest "X" rating for Packing Groups I, II, and III solids up to 750-lb (340-kg).

These dual-purpose drums are DOT/UN approved for use as a salvage drum for dry hazardous materials, or as secondary containment for solids or liquids with a 95-gallon (360-liter) sump capacity. Durable 100% polyethylene construction is chemical and weather resistant to withstand the rigors of land, air and sea transportation. Twist-on threaded lid makes closure safe and easy. Simply use a forklift to relocate the drums. Units nest when empty for compact storage. Select from yellow or black polyethylene.



28201



28203



Description	Recycled Content	Sump Capacity Gallons/Liters	Outside Dim. OD x H	UN Cert. No	Compliance	Model No	Ship Wt lb/kg
Overpack/salvage drum; yellow	None	95/360	31 x 43.25 in 787 x 1099 mm	1H2/X340/S	DOT/UN	28201	47/21
Overpack/salvage drum; black						28203	

EcoPolyBlend™ Single- and Double-Drum Collection Centers

All-weather construction stands up to the harshest environments

Chemical-resistant 100% recycled polyethylene offers effective and economical spill control for 55-gallon (200-liter) drums. Forklift channels allow for easy relocation (when empty). Lids include lock to prevent unauthorized access.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



28683, Dual covers open separately for convenient access to either drum.



28685 with funnel 28680 on 28270 steel dolly



Description	Sump Capacity Gallons/Liters	Outside Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
Double-drum collection center	180/681	60 x 39 x 47 in 1524 x 991 x 1194 mm	E,S,0	28683	108/49
Single-drum collection center	66/250	33 top dia x 31.75 in 838 top dia x 806 mm		28685	44/20
Steel drum dolly for single drum	—	fits 28685	—	28270	14/6

Aerosolv® Aerosol Can Disposal System

Safely recycle aerosol cans while reducing disposal costs and minimizing waste

- Save thousands of dollars on hazardous waste disposal costs
- Turn aerosol cans into recyclable steel—save on landfill space for a cleaner environment

The Aerosolv® system safely converts spent aerosol cans from solid hazardous waste to a non-hazardous material. It accepts industry standard sized cans with a maximum height of 8½-in (215-mm) and threads directly into a standard 2-in (51-mm) bung on a 30- (110-liter) or 55-gallon (200-liter) drum. Body is made of low maintenance aluminum and all moving parts are 308 stainless steel. A non-sparking pin punctures the can, and the residual liquids flow into the collection drum. One 55-gallon (200-liter) drum holds approximately 4,200 spent aerosol cans. Punctured, discharged, cans do not meet the definition of hazardous waste per EPA 40 CFR 261.23(a)(6), and thus can be treated as recyclable scrap metal.

Attach the two-part combination filter to the 3/4-in (19-mm) bung to filter VOCs from any residual propellants. The bottom coalescing cartridge transforms residual liquids into droplets that collect in the reservoir of the cartridge and safely drain into the drum. The top activated carbon filter cartridge indicates saturation and serves as a replacement reminder. Economical, non color-changing filter is also available. System includes a combination filter, safety goggles, and an anti-static ground wire with alligator clip. EPA compliant.



Use Aerosolv® anywhere you find aerosol cleaners, adhesives, and lubricants.



Description	Shipping Dim. W x D x H	Compliance*	Model No	Ship Wt lb/kg
Aerosolv®	18 x 18 x 7 in 457 x 457 x 178 mm	E	28202	12/5

Accessories	Model No
Counter Accessory for any Aerosolv® Unit	28225
Color Changing Combination Coalescing/Carbon Filter	28224
Color Changing Activated Carbon Cartridge (2pk)	28223
Combination Coalescing/Carbon Filter (non-color changing)	28197
Activated Carbon Cartridge (2pk) (non-color changing)	28198
Aerosolv® Maintenance Repair Kit (for use with any Aerosolv®)	28200
Includes: 1 non-sparking puncture pin with O-rings	
1 Aeroprene (polychloroprene) gasket	
1 Spring	
3 bridge pins	
1 tube of grease	
Replacement Aeroprene (polychloroprene) gasket	28111
Replacement poly sleeve	28181

†Coalescing filter can only be purchased in combination with a carbon filter.

Note: With the 28202 Aerosolv® unit you must leave the last aerosol can punctured and drained clamped in the unit to maintain a closed container as defined by OSHA.




Collect empty aerosol cans in open-head drums . . .

Popular Cease-Fire® open-head drums are made of durable steel and come in sizes up to 55-gallon (200-liter)—a great way to collect cans for recycling! Visit justritemfg.com for details.

Color Changing Filter



Non-Color Changing Filter



Retrofit your existing #28202 Aerosolv® with #28225 Counter for easy recordkeeping.



Built-in counter is a great tool for easy adherence to your ISO 14001 program.

Aerosolv® Super System

Certified by the EPA's Environmental Technology Verification Program (ETV)

- Built-in counter tracks number of cans punctured
- Protective coating for easy cleaning

Aerosolv® Super System offers all the features of the original Aerosolv® system plus greater vapor reduction, easy tracking, and added security. Lockout and shut-off mechanism seals the system and drum when not in use to eliminate the escape of hazardous vapors to meet OSHA requirements. Easily comply with your ISO 14001 program using the built-in counter. Includes a combination coalescing/saturation indicating carbon filter, a padlock with key, anti-static ground wire with C-clamp, and safety goggles.

EPA compliant and ETV certified.



Description	Shipping Dim. W x D x H	Compliance*	Model No	Ship Wt lb/kg
Aerosolv® Super System with Counter	18 x 18 x 7 in 457 x 457 x 178 mm	E,V	28230	12/5
Color Changing Combination Coalescing/Carbon Cartridge with auto shut-off valve	6 x 6 x 16 in 152 x 152 x 406 mm	—	28228	3/1
Replacement Color Changing Activated Carbon Cartridge (2 pack)			28229	5/2



28231

Aerosolv® Dual-Compliant System

Designed to comply with California's vapor emission regulation SB1158

Aerosolv® Dual-Compliant System includes all the great features of the Aerosolv® Super System plus a shut-off valve in the puncturing unit and a check valve in the carbon cartridge to prevent off-gassing. A poly lid cover and a poly containment sump help you stay compliant whether you are accumulating or transporting processed aerosol cans for scrap. Includes a combination coalescing/saturation indicating carbon filter, a padlock with key, antistatic ground wire with C-clamp, and safety goggles.

EPA compliant and ETV certified.



Description	Shipping Dim. W x D x H	Compliance*	Model No	Ship Wt lb/kg
Aerosolv® Dual Compliant Can Disposal System with Counter	27 x 27 x 10 in 457 x 457 x 178 mm	E,V	28231	21/10

Note: See replacement filters above.



28190

Prosolv® System

Safely and economically convert gas cylinders into recyclable steel containers

The Prosoolv® System removes the sealing sleeve and internal valve stem from propane, MAPP, and 3/4-in (19-mm) male threaded calibration gas cylinders (do not use with oxygen bottles). It empties and filters propellants from cylinders converting them into non-hazardous recyclable material.

EPA compliant.



Description	Shipping Dim. W x D x H	Compliance*	Model No	Ship Wt lb/kg
*Prosoolv® Includes: vent device, carbon filter, antistatic wire, safety goggles, sleeve removal tool, and 40 certification tags	15 x 11 x 7 in 381 x 279 x 178 mm	E	28190	8/4
Replacement filter with 40 tags	6 x 6 x 9 in 152 x 152 x 229 mm	—	28191	3/1
Replacement sleeve removal tool	5 x 6 x 4 in 127 x 152 x 102 mm	—	28192	1/0.5

Warehouse Shipping Locations

Illinois

Justrite Warehouse
3501 Justrite Drive
Mattoon, IL 61938 U.S.A.
Tel: 1-217-234-7350
Fax: 1-217-234-3160

California

Western Safety Associates
267 Winfield Circle
Corona, CA 92880 U.S.A.
Tel: 1-951-371-8685
Fax: 1-951-371-2496

Washington

Tucker-Weitzel & Assoc., Inc.
230 S. Austin Street
Seattle, WA 98108 U.S.A.
Tel: 1-206-763-3690
Fax: 1-206-763-3797

North Carolina

Justrite Southeast Distribution Ctr.
1804 River Street
Wilkesboro, NC 28697
Tel: 1-800-798-9250
Fax: 1-800-488-5877

China (Mainland)

Justrite China
Wuxi, China
Tel: 011+86-400-812-1906

China (Outside Mainland)

Justrite Asia
Zhuhai, China
Tel: 011+86-756-322-9909

Europe

Justrite Europe
Duesseldorf, Germany
Tel: 1-217-238-5091

United Kingdom

Justrite U.K.
Stockport, United Kingdom
Tel: 1-217-234-7494

Email for all International locations: internationalcs@justritemfg.com

Operations - U.S.A.

Justrite Manufacturing Company, L.L.C.
3921 DeWitt Avenue
Mattoon, IL 61938 U.S.A.

Manufacturing, Finance (billings), Purchasing,
Information Technology & Human Resources
Tel: 1-217-234-7486 Fax: 1-217-234-7632

Corporate - U.S.A.

Justrite Manufacturing Company, L.L.C.
2454 Dempster Street
Des Plaines, IL 60016 U.S.A.

Sales, Marketing & Administrative
Tel: 1-847-298-9250 Fax: 1-847-298-9261

Operations - China

Justrite Safety Technology (Wuxi) Co., Ltd.
Room 502, Building B,
A-Park Technology & Business Center,
#35 South Changjiang Road, Wuxi 214028, China

Tel: 011+86-400-812-1906
Fax: 011+86-510-85305038

Customer Service North America

Tel: 1-800-798-9250 Fax: 1-800-488-5877
custserv@justritemfg.com

Customer Service International

Tel: 1-217-234-7494 Fax: 1-217-234-7420
internationalcs@justritemfg.com

Return shipments must be authorized. Call customer service for RMA form.

Justrite Limited Warranty



All Justrite products shown in this Environmental Catalog are covered by a Limited Warranty against defects in materials and workmanship for a period of one year, or as otherwise currently advertised, from date of purchase.

The Warranty is limited to the replacement of products. Warranty does not apply to any products which have been subject to any misuse, including but not limited to products used with materials (primarily liquids) that are not recommended by the manufacturer in instructions furnished with the product or in published product descriptions; products which have been altered in any way by the user or used in a manner inconsistent with their intended use; products which have been subjected to severe treatment (undue pressure against movable parts, exposure to severe weather, dropping, etc.) not reasonably associated with "ordinary" usage. THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL JUSTRITE BE LIABLE FOR ANY LOSS OF PROFITS OR ANY INDIRECT OR CONSEQUENTIAL DAMAGES ARISING OUT OF ANY SUCH DEFECT IN MATERIAL OR WORKMANSHIP.



The following Justrite products are also covered by a Limited Warranty against weathering and ultraviolet (UV) degradation caused by exposure to natural sunlight for a period of five years from the date of purchase: Rigid-Lock QuickBerm® Plus, Rigid-Lock QuickBerm®


Justrite and Chemical Compatibility

Because of the complex nature of chemicals, Justrite cannot offer specific recommendations on chemical compatibility. Your chemical supplier, MSDS sheets, or other expert sources should be consulted. To aid in your decision process to select the appropriate Justrite product for your application, contact Justrite Customer Service to obtain sample material parts for you to test with the chemicals you are using. Justrite makes no guarantee of results and assumes no obligation or liability in connection with the use of these products and their application relative to their chemical compatibility. It is the end user's sole responsibility to determine the nature of the materials to be contained and to select the proper product suitable for a particular application. Furthermore, it is the end user's responsibility to insure that the product selected is suitable for its intended use. **JUSTRITE MAKES NO WARRANTY, EXPRESSED OR IMPLIED OF MERCHANTABILITY OR FITNESS FOR PURPOSE, and assumes no liability in connection with any product made or sold by Justrite with regard to its use or chemical compatibility.**

Justrite Printed Catalog

Warranty Disclaimer: Justrite has made a diligent effort to illustrate and describe the products in this catalog accurately; however, such illustrations and descriptions are for the sole purpose of identification, and do not express or imply a warranty that the products are MERCHANTABILITY, or FIT FOR A PARTICULAR PURPOSE, or that the products will necessarily conform to the illustrations or descriptions. Always check for product specifications prior to purchase. No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorised by Justrite. Justrite reserves the right to correct publishing errors.

Note: Justrite metric equivalents may be inconsistently noted. Capacities shown may be nominal because some products may hold more than listed to accommodate manufacturing tolerances and expansion, as well as others are designed to accommodate additives which is a common practice with safety can usage. Additionally, "rounding" may occur to simplify data or where catalog space is restrictive. In other cases nominal capacities have simply become accepted "industry practice" over the last 100 years since Justrite has been in business.



©2014 Justrite Mfg. Co.
Code No. 778-04-2014 (0715)
Catalog Part No. 25003





When it comes to protecting people and businesses against hazardous materials, choose the world's most trusted source of safety containment systems.



Check out these new products!



Corner Safety Cabinets



Hazardous Material Safety Cabinets



EN 90-Minute Safety Cabinets



Custom Safety Cabinets

Safesite™ Combo Safety Chest



Outdoor Safety Lockers

Ask about this new service!

FOR JUSTRITE® AUTHORIZED DISTRIBUTORS

GET ANSWERS 24/7

- ✓ PRICING
- ✓ PRODUCT AVAILABILITY
- ✓ ORDER STATUS



justritefmg.com