




**90 R US**  
**ERGO™ Central Nut Adjustable**  
**Wrenches with Rubber Handle and**  
**Phosphate Finish**



**PRODUCT DETAILS**

- Adjustable wrenches developed according to the scientific ERGO™ process
- Jaw will not fall out even at maximum opening of the wrench
- Head combines slim design for accessibility with strength for performance
- Laser scale in mm for pre-adjusting and accurate measurement
- Skydrol- and oil-resistant rubber handle
- High-performance alloy steel forged in single piece
- Phosphate finish, precision-hardened and anti-corrosion treated
- Left turning screw
- Standards: ISO 6787, DIN 3117, ASME B107.8-2003 and BS 6333
- Maximum comfort with minimum effort thanks to ergonomic design
- Ergonomically designed thermoplastic elastomer handle distributes pressure uniformly in the hand, reducing the risk for work related injuries
- The handle never feels too warm or too cold and tolerates oil and grease. Soft, high-friction surface reduces the risk of slipping
- Parallel jaws placed at a 15° angle provide a firm grip and best reach
- Ultimate strength through precision hardening and high-performance alloy steel

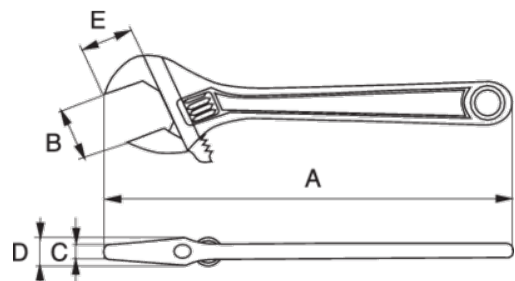

PRODUCT ATTRIBUTES

| Product          | <b>A</b> | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> | <b>E</b> | g     |
|------------------|----------|----------|----------|----------|----------|----------|-------|
| <b>9072 R US</b> | 257 mm   | 10 in    | 31 mm    | 8,7 mm   | 15,5 mm  | 29 mm    | 425 g |
| <b>9070 R US</b> | 158 mm   | 6 in     | 20 mm    | 5,3 mm   | 11,3 mm  | 19 mm    | 139 g |
| <b>9073 R US</b> | 308 mm   | 12 in    | 34 mm    | 11,9 mm  | 17,6 mm  | 34 mm    | 730 g |
| <b>9071 R US</b> | 208 mm   | 8 in     | 27 mm    | 6 mm     | 12,9 mm  | 24 mm    | 272 g |