
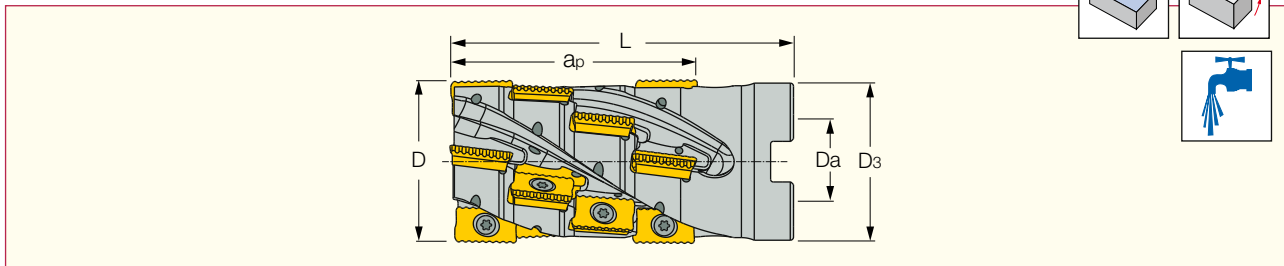


MILLSHRED

P290 LINE

P290 SM

Extended Flute Shell Mills, Carrying 18 mm Long Edged Inserts



Designation	D	ap	Flute	Z	L	Da	D3	Rd°	Kg
P290 SM D050-04-36-22-18	50.00	36.00	4	8	65.00	22.00	46.40	1.0	0.47
P290 SM D050-04-53-22-18	50.00	53.00	4	12	80.00	22.00	46.40	1.0	0.57
P290 SM D050-04-71-27-18	50.00	71.00	4	16	105.00	27.00	48.00	1.0	0.73
P290 SM D063-05-53-27-18	63.00	53.00	5	15	80.00	27.00	55.00	0.8	1.00
P290 SM D063-05-71-27-18	63.00	71.00	5	20	100.00	27.00	55.00	0.8	1.31
P290 SM D080-06-71-32-18	80.00	71.00	6	24	100.00	32.00	74.00	0.5	2.21
P290 SM D100-06-36-32-18	100.00	36.00	6	12	70.00	32.00	78.00	0.3	2.49
P290 SM D100-07-71-40-18	100.00	71.00	7	28	100.00	40.00	85.00	0.3	3.50

• Note: recommended ae up to 0.2xD.

Spare Parts



Designation	Screw	Torx Blade	T-Handle	Shell Lock Screw
P290 SM D050-04-36-22-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M10X50DIN 912
P290 SM D050-04-53-22-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M10X60DIN912
P290 SM D050-04-71-27-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M12X70DIN912
P290 SM D063-05-53-27-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M12X70DIN912
P290 SM D063-05-71-27-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M12X70DIN912
P290 SM D080-06-71-32-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M16X80
P290 SM D100-06-36-32-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M16X50DIN912 12.9
P290 SM D100-07-71-40-18	SR 14-544/S	BLD T15/M7	SW6-T	SR M20X80DIN912

