

# SPREADERS

Hydraulic  
1-1/2 Ton



**HS2000**  
(Forged Steel)

## THE HYDRAULIC PRY BAR!

- Use to lift machines or as a clamp; spread concrete forms or rebar or perform straightening jobs.
- Conforms to ASME B30.1 standard.
- High strength alloy steel forged upper and lower jaws on HS2000.
- Jaws are spring-return; retract automatically when pressure is released.


**No. HS2000** – 1-ton capacity spreader. Full 2,000 lbs. capacity at 10,000 PSI with 4" spread. Can be "dead-ended" at

4" spread under full load. Needs only 9/16" clearance to engage jaws.  
**No. HS3000** – 1 1/2-ton capacity spreader. Full 3,000 lb. capacity at 10,000 psi. with 11 1/2" spread. Greater than competitive units. Needs only 1 1/4" clearance to engage jaws. Can be "dead-ended" at 11 1/2" spread at full load.

**HS3000**  
(High Grade Ductile Iron)



Tested to conform to ASME B30.1 standard

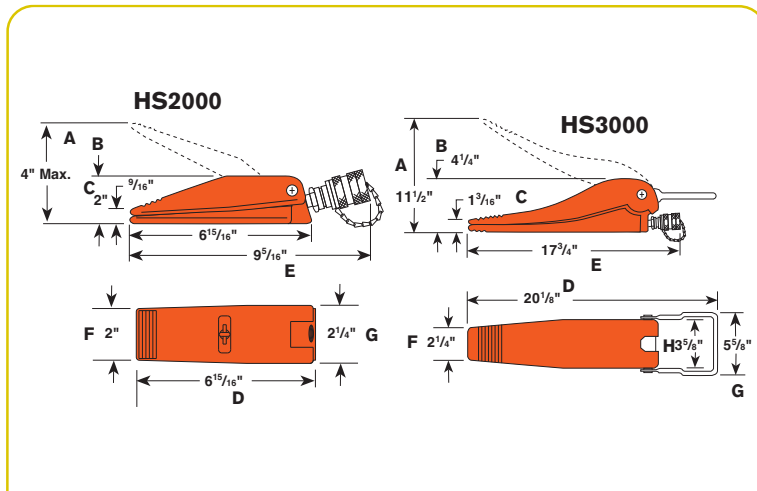

Cap. (tons)	Max. Spread (in.)	Order Number	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	H (in.)	Oil Capacity (cu. in.)	Min. Clearance Required (in.)	Weight (lbs.)
1	4	<b>HS2000</b>	4	2	9/16	6 15/16	9 9/16	2	2 1/4	—	.63	9/16	4.8
1 1/2	11 1/2	<b>HS3000</b>	11 1/2	4 1/4	1 3/16	20 1/8	17 3/4	2 1/4	5 5/8	3 5/8	3.5	1 1/4	22

HS2000 SPECIFICATIONS				HS3000 SPECIFICATIONS			
Maximum rated capacity.....	1 ton @ 10,000 psi	Maximum rated capacity.....	1 1/2-ton @ 10,000 psi				
Maximum spread.....	4"	Maximum spread.....	11 1/2"				
Minimum clearance required.....	9/16"	Minimum clearance required.....	1 1/4"				
Cu. in. oil required .....	.63	Cu. in. oil required .....	3.50				

