




H93410X

Arc Flash Full Body Harness

FEATURES

- Meets requirements of ASTM F887
- 1¾ inch Kevlar® Webbing
- Dielectric Hardware
- SIGMA™ flame resistant (FR) Backpad, Waistpad and protective label cover
- Built in Relief Handles assist user to get into the Chair in the Air after fall arrest

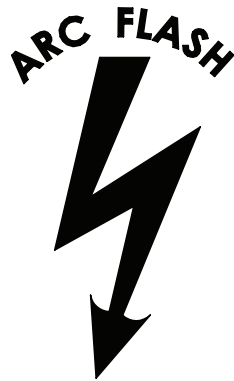

SPECIFICATIONS

Model No.	Size	D-Rings	D-Ring Material	Chest Connection	Leg Connection	Capacity	Approx. Weight	Compliance Standards
H934101	Small	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	425lbs (193 kg)	4.4 lbs (2.0 kg)	ANSI Z359.11- 2021 OSHA 29 CFR 1910 & 1926
H934102	Medium/Large	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	425lbs (193 kg)	4.5 lbs (2.0 kg)	ANSI Z359.11- 2021 OSHA 29 CFR 1910 & 1926
H934104	X-Large	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	425lbs (193 kg)	4.5 lbs (2.1 kg)	ANSI Z359.11- 2021 OSHA 29 CFR 1910 & 1926
H934105	XX-Large	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	425lbs (193 kg)	4.6 lbs (2.1 kg)	ANSI Z359.11- 2021 OSHA 29 CFR 1910 & 1926

*See User Instructions for more information.

⚠ WARNING: Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet