



FALL PROTECTION

BANTAM 6' WEB LEADING EDGE

EXCLUSIVE INNOVATION

Compact and Versatile
Leading Edge Protection

- 30% weight savings
- Tested and approved over steel beam, precast concrete and b-deck
- Meets ANSI z359.14-2021, Class 2; OSHA Standards
- Kevlar® & UHMWPE Webbin



WERNERCO.COM





BANTAM 6' WEB LEADING EDGE

Lightweight & Rugged Design

- 30% weight savings using WEB vs Cable
- Tested and approved for use over steel beam, precast concrete and b-deck
- The Minimum Arrest Distance is less than 24-inches when used overhead

Yellow accent provides clear identification of Class 2: Leading Edge


Recessed Label Protection

Leading Edge

Meets ANSI z359.14-2021, Class 2; OSHA Standards

Exclusive Innovation

Kevlar & High-Performance Polyethylene Webbing (UHMWPE)

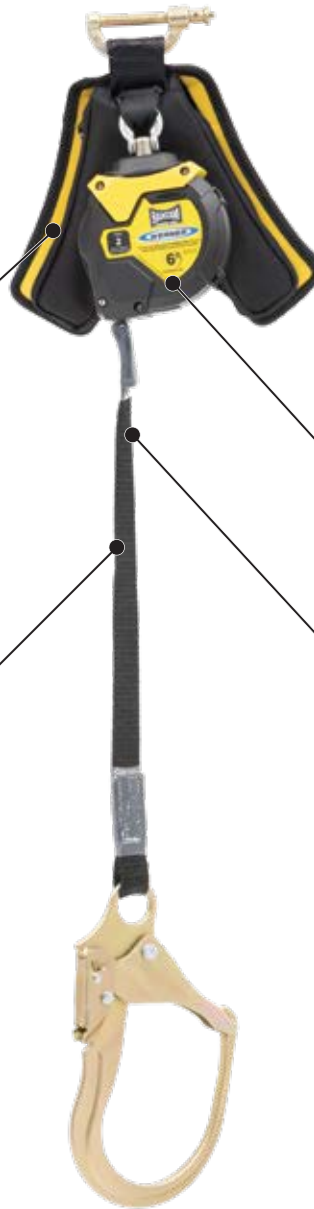

SPECIFICATIONS

MODEL NO.	LENGTH	SINGLE OR TWINLEG	HOUSING	HOUSING CONNECTOR	LIFELINE CONSTITUENT	LIFELINE CONNECTOR
R430006LE	6'	Single	Thermoplastic	Harness Web Connector	Kevlar Webbing	Steel Swivel Snap Hook
R430006LER	6'	Single	Thermoplastic	Harness Web Connector	Kevlar Webbing	Aluminum Rebar Hook
R430006LESR	6'	Single	Thermoplastic	Harness Web Connector	Kevlar Webbing	Steel Form Hook
R433006LE	6'	Twinleg	Thermoplastic	Harness Web Connector	Kevlar Webbing	Steel Swivel Snap Hook
R433006LER	6'	Twinleg	Thermoplastic	Harness Web Connector	Kevlar Webbing	Aluminum Rebar Hook
R433006LESR	6'	Twinleg	Thermoplastic	Harness Web Connector	Kevlar Webbing	Steel Form Hook