




# R531007

## Baseline Twinleg Self Retracting Lifeline

### FEATURES

- A100341 Twinleg Carabiner Adaptor
- 7 foot working range
- 1 inch UHMWPE / polyester webbing
- Aluminum housing
- Recessed labels
- Impact indicators
- Aluminum rebar hook has a gate opening of 2 ½ inches (63.5 mm)
- Steel rebar hook has a gate opening of 2 ⅞ inches (65 mm)

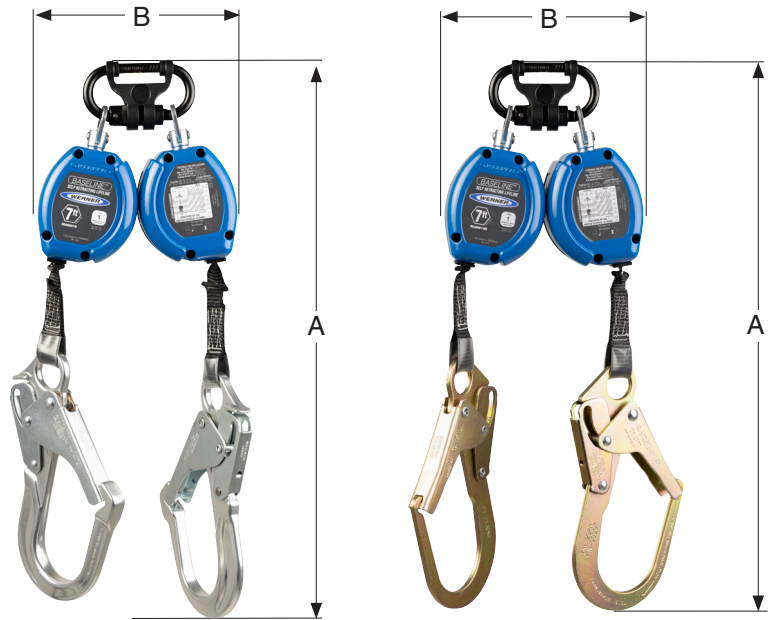

### SPECIFICATIONS

Model No.	Lifeline Connector	(A)	(B)	Depth	Aprox. Weight
R531007	Steel Snap Hook	18 in (456 mm)	7 ⅝ in (188 mm)	3 in (76 mm)	6.2 lb (2.8 kg)
R531007-R	Aluminum Rebar Hook	21 ⅓ in (543 mm)	7 ⅝ in (188 mm)	3 in (76 mm)	7.4 lb (3.3 kg)
R531007-SR	Steel Rebar Hook	21 ⅓ in (543 mm)	7 ⅝ in (188 mm)	3 in (76 mm)	7.6 lb (3.4 kg)

### COMPLIANCE STANDARDS

Meets	Maximum Arrest Distance	Average Arrest Force	Maximum Arrest Force	Free Fall Limit	Capacity
ANSI Z359.14-2021 CLASS 1	24 in (610 mm)	900 lbf (4 kN)	1,800 lbf (8 kN)	24 in (610 mm)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.140 & 1926.502	24 in (610 mm)	N/A	1,800 lbf (8 kN)	24 in (610 mm)	400 lbs (141 kg)

\*See User Instructions for more information.

**⚠ WARNING:** Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

# Technical Data Sheet