


FLAP DISCS



GRIND AND FINISH IN ONE STEP

Get the most demanding grinding and finishing jobs done right and done fast.

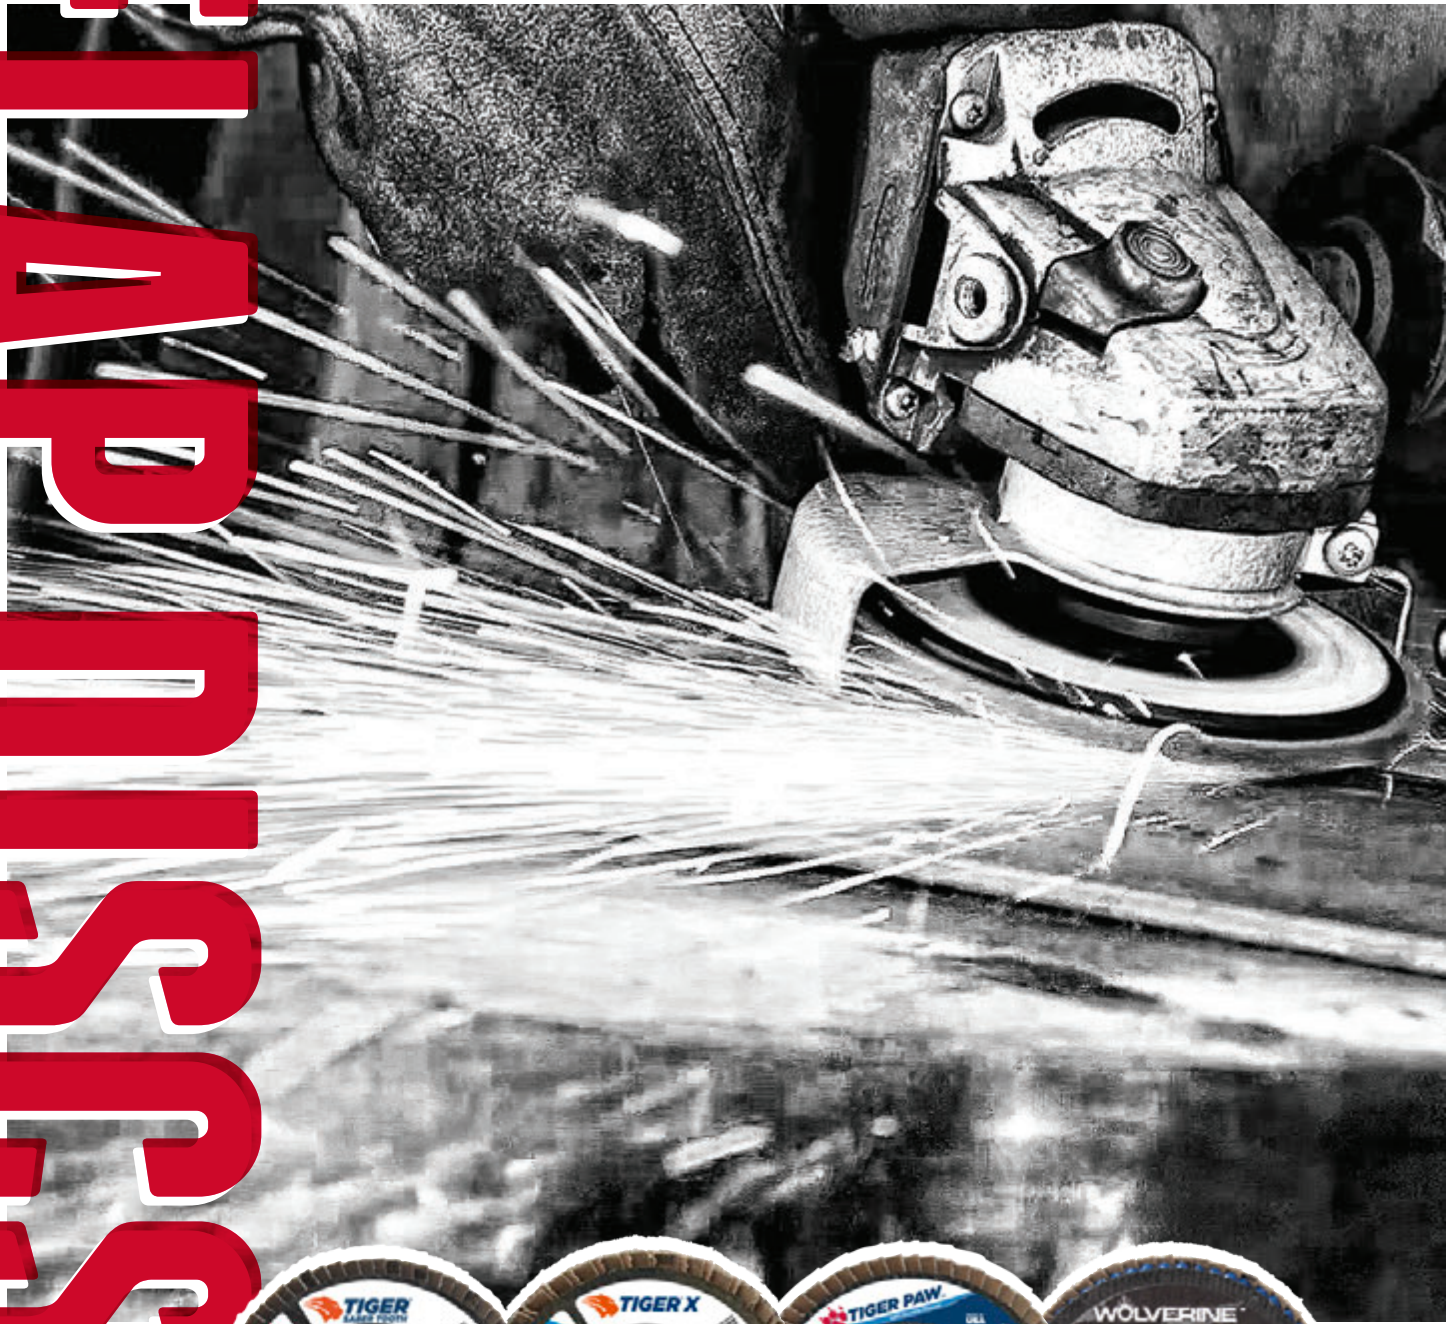

SELECTING THE RIGHT FLAP DISC

Weiler's abrasive flap discs grind and finish in one step, saving you time and money. There's no switching from a type 27 grinding wheel to a resin fiber disc.



P MAX PERFORMANCE



TIGER® CERAMIC

- **TOP COAT** for cool grinding
- Protects from heat discoloration
- Prevents loading on soft alloys

GRAIN TYPE

Ceramic alumina

CONTAMINANT FREE
CONTAIN LESS THAN 0.1%
IRON, SULFUR & CHLORINE

STYLES



BEST ON

STEEL / METAL **ALUMINUM**
STAINLESS **HARD-TO-GRIND**

(Hard-to-grind metals include tool steel, inconel, high nickel alloy, titanium and armored steel)

P HIGH PERFORMANCE



TIGER X

- **FLAT SURFACE GRINDING**
- Less effort required
- Fast grinding & long life

GRAIN TYPE

Ceramic & zirconia alumina

CONTAMINANT FREE
CONTAIN LESS THAN 0.1%
IRON, SULFUR & CHLORINE

STYLES



*Big Cat

BEST ON

STEEL / METAL **STAINLESS**

(Metal includes structural steel and cast iron)

P PERFORMANCE



TIGER PAW™

- **SUPERIOR EDGE GRINDING**
- Aggressive stock removal

GRAIN TYPE

100% zirconia alumina

CONTAMINANT FREE
CONTAIN LESS THAN 0.1%
IRON, SULFUR & CHLORINE

STYLES



BEST ON

STEEL / METAL **STAINLESS**

(Metal includes structural steel and cast iron)

V VALUE



WOLVERINE®

- Fast stock removal
- Consistent performance

GRAIN TYPE

Zirconia alumina

STYLES



BEST ON

STEEL / METAL

*Big Cat is a zirconia alumina flap disc and does not contain any ceramic alumina.

SPECIALTY FLAP DISCS



| | | MAX PERFORMANCE | HIGH PERFORMANCE | PERFORMANCE |
|---|--|-------------------------------------|-------------------------------------|--|
| ANGLED (Fillet Welds) | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| TRIMMABLE (Non-Marking) | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| ALUMINUM BACK (Rigid Support) | | | <input checked="" type="checkbox"/> | |
| MINI (Tight Spaces) | | | | <input checked="" type="checkbox"/> (Bobcat) |

Refer to ANSI B7.1 for storage & handling details

KEY: PERFORMANCE LINE VALUE LINE

All products meet ANSI B7.1

STYLE



CONICAL (Type 29)
15° – 35°

Angled flaps maximize surface contact for aggressive stock removal on flat surfaces.



FLAT (Type 27)
0° – 15°

Smooth grinding, blending and finishing on flat surfaces and slight contours.



HIGH DENSITY (Type 27)
0° – 15°

Conformable to irregular surfaces. Smooth grinding, blending and finishing on flat surfaces.



HIGH DENSITY (Type 29)
15° – 35°


Conformable to irregular surfaces. Aggressive stock removal, edge beveling and chamfering.



ANGLED (Type 27 / Hybrid)
0° – 35°

Curved flaps for grinding fillet welds, T-joints and hard-to-reach areas.

GRIT

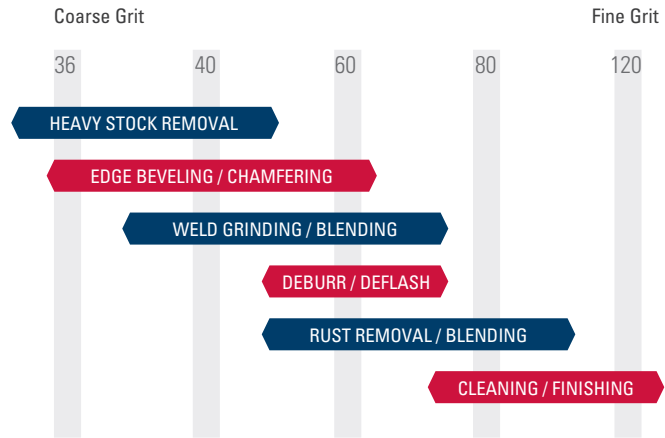

GRAIN



CERAMIC ALUMINA (CA)

- Self-sharpening micro fracturing crystals expose sharp edges
- Maintains a high cut-rate for the life of the grain
- Longest cutting life under moderate to high pressure
- Exceptional performance on hard-to-grind metals



ZIRCONIA ALUMINA (ZA)

- Self-sharpening crystals
- Holds up under high temperatures and extreme pressure
- Sharp, fast cutting, long lasting grain




ALUMINUM OXIDE (AO)

- Single crystal that dulls during use
- Good initial cut rate
- Hard, durable grain

BACKING

PHENOLIC



Prevents backing from scratching the workpiece.

ALUMINUM



Rigid support for maximum aggression; recyclable.

COMPOSITE*



Trimmable, non-marking backing; allows access to hard-to-reach areas.

*BobCat™ Discs are not trimmable.

ARBOR

5/8" - 11 NUT

- Quick change over
- Eliminates cross-threading experienced with plastic backs
- Metal nut eliminates the disc from sticking to the grinder due to heat build up



OPEN ARBOR

- Requires adapting nuts
- 5/8" option for 4" grinders
- 7/8" option for 4-1/2" and larger grinders



MOUNTING DISCS WITH OPEN ARBORS



MANDRELS & METAL HUB PADS

- For quick-change on tools with 1/4" collets





STANDARD DENSITY FLAP DISCS



MADE IN
USA
WITH GLOBAL
MATERIALS



Weiler's Tiger discs are engineered to maximize productivity and minimize operating costs for professionals who demand more. Get the right flap disc for your application and **get more done with Tiger**.

Grinding & blending a weld between two steel plates.



50106

P MAX PERFORMANCE / TIGER® CERAMIC (SABER TOOTH)

Top Coated for Cool Grinding / Ceramic Alumina / Phenolic Back

| STEEL / METAL | STAINLESS | HARD-TO-GRIND | ALUMINUM | TYPE 29 | |
|---------------|-----------|---------------|-----------|------------|-------------|
| | | | | 7/8" Arbor | 5/8"-11 Hub |
| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # |
| 4-1/2" | 36 | 13,000 | 10 | 50100 | 50104* |
| | 40 | | | 50101 | 50105* |
| | 60 | | | 50102 | 50106* |
| | 80 | | | 50103 | 50107* |
| 5" | 40 | 12,000 | 10 | 50538 • | — |
| | 60 | | | 50539 • | — |
| | 80 | | | 50540 • | — |
| 7" | 36 | 8,600 | 10 | 50108 | 50112* |
| | 40 | | | 50109 | 50113* |
| | 60 | | | 50110 | 50114* |
| | 80 | | | 50111 | 50115* |



51205

P HIGH PERFORMANCE / TIGER X

Fast Grinding & Long Life on Flat Surfaces / Ceramic & Zirconia Alumina / Phenolic Back

| STEEL / METAL | STAINLESS | TYPE 29 | | TYPE 27 | | | |
|---------------|-----------|------------|-------------|------------|-------------|--------|--------|
| | | 7/8" Arbor | 5/8"-11 Hub | 7/8" Arbor | 5/8"-11 Hub | | |
| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # | Item # | Item # |
| 4-1/2" | 36 | 13,000 | 10 | 51200 | 51204* | — | — |
| | 40 | | | 51201 | 51205* | 51223 | 51226* |
| | 60 | | | 51202 | 51206* | 51224 | 51227* |
| | 80 | | | 51203 | 51207* | 51225 | 51228* |
| 5" | 36 | 12,000 | 10 | 51208 | — | — | — |
| | 40 | | | 51209 | 51212* | — | — |
| | 60 | | | 51210 | 51213* | — | — |
| | 80 | | | 51211 | 51214* | — | — |
| 6" | 40 | 10,200 | 10 | 51237 | 51241* | — | — |
| | 60 | | | 51238 | 51242* | — | — |
| | 80 | | | 51239 • | 51243* • | — | — |
| 7" | 36 | 8,600 | 10 | 51215 | 51219* | — | — |
| | 40 | | | 51216 | 51220* | 51229 | 51232* |
| | 60 | | | 51217 | 51221* | 51230 | 51233* |
| | 80 | | | 51218 | 51222* | 51231 | 51234* |



Industry First

X3

Technology

grain anchoring system,
dual flap design,
& engineered backing.



Ceramic alumina and zirconia alumina grain mix
Grinds Faster and Lasts Longer.



Beveling pipe on edge with a Tiger Paw flap disc.

P PERFORMANCE / TIGER PAW™

Aggressive Stock Removal for Edge Grinding / 100% Zirconia Alumina / Phenolic Back

| STEEL / METAL | | STAINLESS | | TYPE 29 5/8" Arbor | TYPE 29 7/8" Arbor | TYPE 29 5/8"-11 Hub | TYPE 27 5/8" Arbor | TYPE 27 7/8" Arbor | TYPE 27 5/8"-11 Hub |
|---------------|------|-----------|-----------|-----------------------|-----------------------|------------------------|-----------------------|-----------------------|------------------------|
| Dia. | Grit | Max. RPM | Std. Pack | Item # | Item # | Item # | Item # | Item # | Item # |
| 4" | 40 | 15,000 | 10 | 51104 | — | — | 51101 | — | — |
| | 60 | | | 51105 | — | — | 51102 | — | — |
| 4-1/2" | 36 | 13,000 | 10 | — | 51118 | 51123* | — | 51107 | 51112* |
| | 40 | | | — | 51119 | 51124* | — | 51108 | 51113* |
| | 60 | | | — | 51120 | 51125* | — | 51109 | 51114* |
| | 80 | | | — | 51121 | 51126* | — | 51110 | 51115* |
| 5" | 36 | 12,000 | 10 | — | 51128 | 51153* | — | 51182 | 51155* |
| | 40 | | | — | 51129 | 51132* | — | 51134 | 51156* |
| | 60 | | | — | 51130 | 51133* | — | 51135 | 51157* |
| | 80 | | | — | 51131 | 51154* | — | 51183 | 51158* |
| 6" | 40 | 10,200 | 10 | — | 51175 | 51179* | — | — | — |
| | 60 | | | — | 51176 | 51180* | — | — | — |
| | 80 | | | — | 51177 • | 51181* • | — | — | — |
| 7" | 36 | 8,600 | 10 | — | — | 51149* | — | — | 51139* |
| | 40 | | | — | 51145 | 51146* | — | 51137 | 51140* |
| | 60 | | | — | 51150 | 51147* | — | 51138 | 51142* |
| | 80 | | | — | — | 51148* | — | — | 51143* |



51126

V WOLVERINE®

Consistent Performance / Zirconia Alumina / Phenolic Back

| STEEL / METAL | | | | TYPE 29 5/8" Arbor | TYPE 29 7/8" Arbor | TYPE 29 5/8"-11 Hub | TYPE 27 7/8" Arbor | TYPE 27 5/8"-11 Hub |
|---------------|------|----------|-----------|-----------------------|-----------------------|------------------------|-----------------------|------------------------|
| Dia. | Grit | Max. RPM | Std. Pack | Item # | Item # | Item # | Item # | Item # |
| 4" | 36 | 15,000 | 10 | 31337 | — | — | — | — |
| | 40 | | | 31338 | — | — | — | — |
| | 60 | | | 31339 | — | — | — | — |
| | 80 | | | 31340 | — | — | — | — |
| 4-1/2" | 36 | 13,000 | 10 | — | 31343 | 31349* | 31401 | 31407* |
| | 40 | | | — | 31344 | 31350* | 31402 | 31408* |
| | 60 | | | — | 31345 | 31351* | 31403 | 31409* |
| | 80 | | | — | 31346 | 31352* | 31404 | 31410* |
| | 120 | | | — | 31347 | 31353* | — | — |
| 5" | 36 | 12,000 | 10 | — | 31355 | — | — | — |
| | 40 | | | — | 31356 | — | — | — |
| | 60 | | | — | 31357 | — | — | — |
| | 80 | | | — | 31358 | — | — | — |
| 6" | 40 | 10,200 | 10 | — | 31447 • | 31451* • | — | — |
| | 60 | | | — | 31448 • | 31452* • | — | — |
| | 80 | | | — | 31449 • | 31453* • | — | — |
| 7" | 36 | 8,600 | 10 | — | 31361 | 31367* | — | 31419* |
| | 40 | | | — | 31362 | 31368* | 31414 | 31420* |
| | 60 | | | — | 31363 | 31369* | 31415 | 31421* |
| | 80 | | | — | 31364 | 31370* | — | 31422* |



31343

Key:

P PERFORMANCE LINE Industrial Grade **V** VALUE LINE Professional Grade

• Non-stock product, contact Customer Service for lead times

*Patent # 6,945,863 B1

HIGH DENSITY FLAP DISCS



High density flap discs last up to 40% longer than standard density. They are ideal for grinding and blending uneven or irregular surfaces.

MADE IN USA
WITH GLOBAL MATERIALS

Blending and finishing a weld with a Big Cat flap disc.



50134

P MAX PERFORMANCE / TIGER® CERAMIC HD (SABER TOOTH)

Top Coated for Cool Grinding on Irregular Surfaces / Ceramic Alumina / Phenolic Back

STEEL / METAL STAINLESS HARD-TO-GRIND ALUMINUM

TYPE 27
7/8" Arbor

TYPE 27
5/8"-11 Hub

| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # |
|----------|------|----------|-----------|--------|--------|
| 4-1/2" | 40 | 12,000 | 10 | 50130 | 50133* |
| | 60 | | | 50131 | 50134* |
| | 80 | | | 50132 | 50135* |
| 7" | 40 | 8,600 | 10 | 50136 | 50139* |
| | 60 | | | 50137 | 50140* |
| | 80 | | | 50138 | 50141* |



50804

P HIGH PERFORMANCE / TIGER BIG CAT® HD

Fast Grinding & Long Life on Irregular Surfaces / Zirconia Alumina / Phenolic Back

STEEL / METAL STAINLESS

TYPE 27
7/8" Arbor

TYPE 27
5/8"-11 Hub

| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # |
|----------|------|----------|-----------|--------|--------|
| 4-1/2" | 40 | 12,000 | 10 | 50803 | 50808* |
| | 60 | | | 50804 | 50809* |
| | 80 | | | 50805 | 50810* |
| | 120 | | | 50806 | — |
| 7" | 40 | 8,600 | 10 | 50823 | 50843* |
| | 60 | | | 50824 | 50844* |
| | 80 | | | 50825 | 50845* |
| | 120 | | | — | 50846* |

25MM WIDE FLAPS
INDUSTRY STANDARD

30MM WIDE FLAPS
BIG CAT & TIGER PAW HD


INDUSTRY-LEADING FOOTPRINT

30mm flaps on Big Cat and Tiger Paw Type 27 style flap discs increases surface area grinding



"I have been in the business for 20+ years and I find Weiler to be the best I have ever used."


- **Andy Bettelli**, Pipeline Contractor, A B Welding

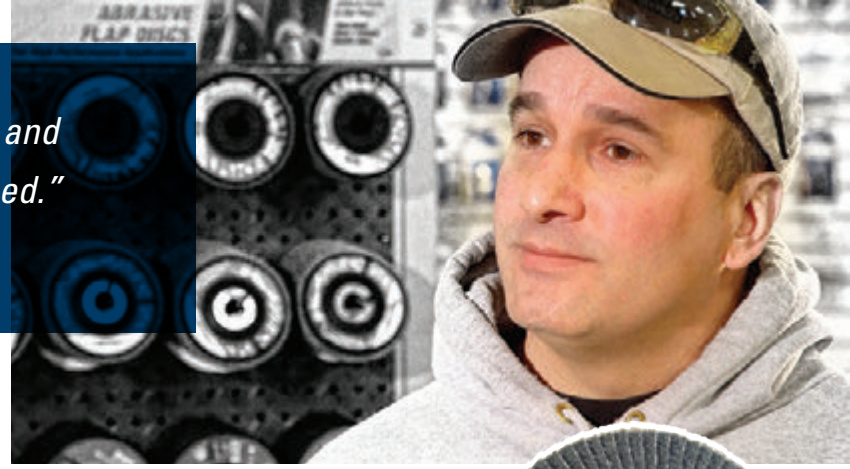

P PERFORMANCE / TIGER PAW™ HD

Aggressive Stock Removal on Irregular Surfaces
100% Zirconia Alumina / Phenolic Back

STEEL / METAL **STAINLESS**



| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # | Item # | Item # |
|----------|------|----------|-----------|---------|----------|---------|---------|
| 4-1/2" | 36 | 12,000 | 10 | 51060 • | 51064* • | 51160 | 51164* |
| | 40 | | | 51061 | 51065* | 51161 | 51165* |
| | 60 | | | 51062 • | 51066* • | 51162 | 51166* |
| | 80 | | | 51063 • | 51067* • | 51163 | 51167* |
| 5" | 40 | 12,000 | 10 | — | — | 51195 • | — |
| | 60 | | | — | — | 51196 • | — |
| | 80 | | | — | — | 51197 • | — |
| 6" | 40 | 10,200 | 10 | — | — | 51199 • | 51187 • |
| | 60 | | | — | — | 51184 • | 51188 • |
| | 80 | | | — | — | 51185 • | 51189 • |
| 7" | 40 | 8,600 | 10 | — | — | 51170 | 51168* |
| | 60 | | | — | — | 51171 | 51169* |




51165

V WOLVERINE® HD

Consistent Performance on Irregular Surfaces / Zirconia Alumina / Phenolic Back

STEEL / METAL



| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # |
|----------|------|----------|-----------|---------|----------|
| 4-1/2" | 40 | 12,000 | 10 | 31387 | 31390* |
| | 60 | | | 31388 | 31391* |
| | 80 | | | 31389 | 31392* |
| 6" | 40 | 10,200 | 10 | 31439 • | 31443* • |
| | 60 | | | 31440 • | 31444* • |
| | 80 | | | 31441 • | 31445* • |



31388

ACCESSORIES

ADAPTING NUTS & SPANNER WRENCH

For use with standard, HD and specialty flap discs.

| Description | Thread Size | For Use With | Std. Pack | Item # |
|----------------|-------------|--|-----------|--------|
| Adapting Nuts | 3/8" - 24 | 4" flap disc with 5/8" arbor hole (can be used with an adjustable or combination wrench) | 1 Pair | 56484 |
| Adapting Nuts | 5/8" - 11 | 4-1/2", 5" & 7" flap discs with 7/8" arbor hole | 1 Pair | 56494 |
| Spanner Wrench | — | Item No. 56494 only | 1 | 56495 |

When mounting, adapters must be nested, see illustration at right.



Key:

P PERFORMANCE LINE Industrial Grade **V** VALUE LINE Professional Grade

• Non-stock product, contact Customer Service for lead times

*Patent # 6,945,863 B1

SPECIALTY FLAP DISCS



Edge chamfering a section of pipe with a Tiger Aluminum Back flap disc.

ALUMINUM BACK

Tiger Aluminum Back flap discs are the benchmark for the pipeline industry, providing rigid support for maximum aggression. These wheels are ideal for removing heavy pitting and resists rolling the bevel ends prior to welding. The aluminum backing also prevents the disc from catching on the bevel when grinding. The aluminum backing plate is 100% recyclable.

MADE IN
USA
WITH GLOBAL
MATERIALS



50519

P HIGH PERFORMANCE / TIGER® ALUMINUM BACK

Fast Grinding & Long Life / Zirconia Alumina / Backing Plate Provides Rigid Support

| STEEL / METAL | STAINLESS | Max. RPM | Std. Pack | TYPE 29 | TYPE 29 | TYPE 29 |
|---------------|-----------|----------|-----------|------------|------------|-------------|
| | | | | 5/8" Arbor | 7/8" Arbor | 5/8"-11 Hub |
| Diameter | Grit | | | Item # | Item # | Item # |
| 4" | 36 | 15,000 | 10 | 50502 | — | — |
| | 40 | | | 50503 | — | — |
| | 60 | | | 50504 | — | — |
| | 80 | | | 50505 | — | — |
| | 120 | | | 50506 | — | — |
| 4-1/2" | 24 | 13,000 | 10 | — | 50511 | 50510 |
| | 36 | | | 50512 | 50517 | |
| | 40 | | | 50513 | 50518 | |
| | 60 | | | 50514 | 50519 | |
| | 80 | | | 50515 | 50520 | |
| 5" | 120 | 12,000 | 10 | — | 50516 | 50509 |
| | 36 | | | 50522 | — | |
| | 40 | | | 50523 | — | |
| | 60 | | | 50524 | — | |
| | 80 | | | 50525 | — | |
| 7" | 120 | 8,600 | 10 | — | 50526 | — |
| | 24 | | | — | 50541 | |
| | 36 | | | 50532 | 50542 | |
| | 40 | | | 50533 | 50543 | |
| | 60 | | | 50534 | 50544 | |
| 80 | — | 50545 | | | | |
| 120 | — | 50546 | | | | |



Self-sharpening ZIRCONIA ALUMINA grains hold up under extreme pressure

Backing plate provides **rigid support** for cleaning pits out of the bevel and shining up the repair to spot the defect

Aluminum backing plate won't catch the bevel, helps **prevent kick back** when grinding

ANGLED DISCS



The 90° angled flap design is ideal for grinding fillet welds, T-joints and other hard-to-reach places. The flaps wrap around the edge of the backing plate, optimizing flap-to-metal contact and providing exceptional feel and control while grinding.



Blending fillet welds to ensure proper penetration prior to inspection.

P MAX PERFORMANCE / TIGER® CERAMIC ANGLED

Top Coated for Cool Grinding on Fillet Welds / Ceramic Alumina / Phenolic Back

| STEEL / METAL | | STAINLESS | | HARD-TO-GRIND | | ALUMINUM | | 7/8" Arbor | | 5/8"-11 Hub | |
|---------------|------|-----------|-----------|---------------|--------|----------|--------|------------|--------|-------------|--|
| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # | Item # | Item # | Item # | Item # | | |
| 4-1/2" | 40 | 13,000 | 10 | 51312 | 51315 | 51313 | 51316 | 51314 | 51317 | | |
| | 60 | | | 51318 | 51321 | 51319 | 51322 | 51320 | 51323 | | |
| | 80 | | | | | | | | | | |
| 5" | 40 | 12,000 | 10 | | | | | | | | |
| | 60 | | | | | | | | | | |
| | 80 | | | | | | | | | | |



51313

P HIGH PERFORMANCE / TIGER ANGLED

Fast Grinding & Long Life on Fillet Welds / Zirconia Alumina / Phenolic Back

| STEEL / METAL | | STAINLESS | | HARD-TO-GRIND | | ALUMINUM | | 7/8" Arbor | | 5/8"-11 Hub | |
|---------------|------|-----------|-----------|---------------|--------|----------|--------|------------|--------|-------------|--|
| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # | Item # | Item # | Item # | Item # | | |
| 4-1/2" | 40 | 13,000 | 10 | 51300 | 51303 | 51301 | 51304 | 51302 | 51305 | | |
| | 60 | | | 51306 | 51309 | 51307 | 51310 | 51308 | 51311 | | |
| | 80 | | | | | | | | | | |
| 5" | 40 | 12,000 | 10 | | | | | | | | |
| | 60 | | | | | | | | | | |
| | 80 | | | | | | | | | | |



51303

SMOOTH FINISH

when grinding fillet welds & T-joints

FLEXIBILITY OF APPROACH

flap design allows you to grind from a wider range of angles

MORE GRIT OPTIONS

gives you the finish and aggression you want

ATTACKS METAL

removing more material in less time



TOP COAT (Ceramic only) grinds cooler to protect valuable parts and prevents loading on softer alloys



MADE IN
USA
WITH GLOBAL
MATERIALS

TRIMMABLE DISCS

A trimmable backing plate allows the operator to increase flap overhang. This feature provides the versatility to adjust for hard-to-reach areas such as fillet welds and irregular shapes.



To trim backing, run against a sharp edge until desired backing diameter is achieved.



50121

P MAX PERFORMANCE / TIGER® CERAMIC TRIM (SABER TOOTH)

Top Coated for Cool Grinding / Ceramic Alumina / Trimmable Composite Back for Versatility

| STEEL / METAL | STAINLESS | HARD-TO-GRIND | ALUMINUM | TYPE 29 | |
|---------------|-----------|---------------|-----------|------------|-------------|
| | | | | 7/8" Arbor | 5/8"-11 Hub |
| Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # |
| 4-1/2" | 40 | 13,000 | 10 | 50117 | 50121* |
| | 60 | | | 50118 | 50122* |
| | 80 | | | 50119 | 50123* |



50003

P PERFORMANCE / TIGER TRIM

Long Grinding Life / Zirconia Alumina / Trimmable Composite Back for Versatility

| STEEL / METAL | STAINLESS | Diameter | Grit | Max. RPM | Std. Pack | TYPE 29 | |
|---------------|-----------|----------|------|----------|-----------|------------|-------------|
| | | | | | | 7/8" Arbor | 5/8"-11 Hub |
| | | Diameter | Grit | Max. RPM | Std. Pack | Item # | Item # |
| 4-1/2" | | | 40 | 13,000 | 10 | 50002 | 50006* |
| | | | 60 | | | 50003 | 50007* |
| | | | 80 | | | 50004 | 50008* |
| | | | 120 | | | 50005 | 50009* |
| 5" | | | 40 | 12,000 | 10 | 50010 | 50014 |
| | | | 60 | | | 50011 | 50015 |
| | | | 80 | | | 50012 | 50016 |



A trimmed back dramatically extends disc life, allowing the operator to use the entire flap while maintaining a consistent working angle

MINI DISCS



The expanded mini flap disc line now offers a threaded button R mount in addition to the current S mount for greater versatility to fit the most popular styles of hub pads. These discs are designed for use on die grinders to provide smooth grinding and enhanced conformability in tight areas.

Weiler BobCat Mini Flap Discs are designed and compatible for use on both industry standard hub pads.



S Mount



R Mount



Edge chamfering a fabricated stainless steel component.

P PERFORMANCE / TIGER BOBCAT™

Grinding Hard-to-Reach Places
Zirconia Alumina / Composite Back

| STEEL / METAL | STAINLESS | Max. RPM | Std. Pack | S MOUNT* TYPE 29 | | R MOUNT+ TYPE 29 | |
|---------------|-----------|----------|-----------|---------------------|--------|---------------------|--------|
| | | | | Item # | Item # | Item # | Item # |
| 2" | 36 | 30,000 | 10 | 50922 | 50932 | 50946 | 50956 |
| | 40 | | | 50923 | 50933 | 50947 | 50957 |
| | 60 | | | 50924 | 50934 | 50948 | 50958 |
| | 80 | | | 50925 | 50935 | 50949 | 50959 |
| | 120 | | | 50926 | 50936 | 50950 | 50960 |
| 3" | 36 | 20,000 | 10 | 50902 | 50912 | 50951 | 50961 |
| | 40 | | | 50903 | 50913 | 50952 | 50962 |
| | 60 | | | 50904 | 50914 | 50953 | 50963 |
| | 80 | | | 50905 | 50915 | 50954 | 50964 |
| | 120 | | | 50906 | 50916 | 50955 | 50965 |

* Back-up pad not required if used with S mount mandrel. 3" discs are compatible with Norton Speed-Lok® TS back-up pads.

+ Back-up pad required. Also compatible with 3M Roloc™ back-up pads.



50923



50952

ACCESSORIES

BOBCAT DRIVE MANDRELS & METAL HUB PADS

For quick-change on tools with 1/4" collets.

| Description | Std. Pack | Item # |
|------------------------------|-----------|--------|
| 2" & 3" S mount mandrel | 1 | 07766 |
| 2" S mount hub pad + mandrel | 1 | 60508 |
| 3" S mount hub pad + mandrel | 1 | 60509 |
| 2" R mount hub pad + mandrel | 1 | 51551 |
| 3" R mount hub pad + mandrel | 1 | 51552 |



60508

60509



51551



07766

Key:

P PERFORMANCE LINE
Industrial Grade

V VALUE LINE
Professional Grade

• Non-stock product, contact Customer Service for lead times

*Patent # 6,945,863 B1



Weiler Abrasives
One Weiler Drive
Cresco, PA 18326
USA

For the full offering of Weiler products, please refer to our Full Line Catalog or visit our website. To discuss specific requirements with a product specialist, call our Applications Hotline at 888.299.2777.

