


A124

Brazed Carbide Tip Screw Machine Length Drill - Metric



Tang to DIN 1809

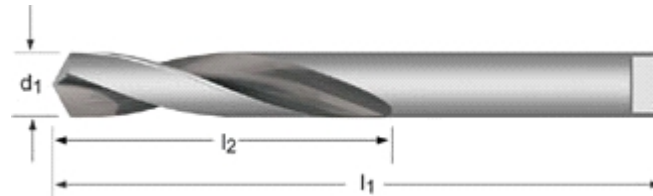

d ₁ R mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	e-code	USD
3.00	0.1181	20	50	A1243.0	77.80
3.20	0.1260	25	56	A1243.2	41.90
3.50	0.1378	25	56	A1243.5	35.40
4.00	0.1575	25	56	A1244.0	66.90
4.20	0.1654	28	63	A1244.2	38.45
4.50	0.1772	28	63	A1244.5	31.30
4.80	0.1890	28	63	A1244.8	33.20
5.00	0.1969	28	63	A1245.0	68.10
5.20	0.2047	32	71	A1245.2	51.00
5.50	0.2165	32	71	A1245.5	36.60
5.80	0.2283	32	71	A1245.8	37.50
6.00	0.2362	32	71	A1246.0	71.20
6.50	0.2559	32	71	A1246.5	34.55
6.80	0.2677	40	80	A1246.8	37.35
7.00	0.2756	40	80	A1247.0	75.50
7.50	0.2953	40	80	A1247.5	37.00
8.00	0.3150	40	80	A1248.0	83.10
8.50	0.3346	50	90	A1248.5	45.40
9.00	0.3543	50	90	A1249.0	90.90
9.50	0.3740	50	90	A1249.5	51.70
10.00	0.3937	56	100	A12410.0	99.70
10.50	0.4134	56	100	A12410.5	59.00
11.00	0.4331	56	100	A12411.0	117.00
11.50	0.4528	63	112	A12411.5	67.30
12.00	0.4724	63	112	A12412.0	135.00
13.00	0.5118	63	112	A12413.0	157.00

d ₁ R mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	e-code	USD
14.00	0.5512	71	125	A12414.0	96.70
15.00	0.5906	71	125	A12415.0	116.00
16.00	0.6299	80	140	A12416.0	128.00