


E025

UNC Machine Tap Spiral Point

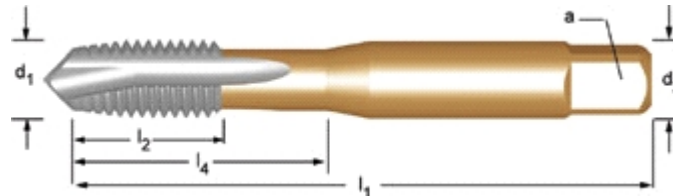

UNC	TPI	l ₁ Inch	l ₂ Inch	d ₂ Inch	$\frac{\square}{R}$ a Inch	z	Limits			l ₄ Inch	e-code	USD
6	32	2"	0.2610	0.1410	0.1100	2	H2	N36	2.85	0.5938	E0256-32	14.35
8	32	2.1/8	0.2484	0.1680	0.1310	2	H2	N29	3.50	0.6526	E0258-32	14.35
10	24	2.3/8	0.4303	0.1940	0.1520	2	H3	N25	3.90	0.8434	E02510-24	14.35
12	24	2.3/8	0.4173	0.2200	0.1650	2	H3	N16	4.50	0.8848	E02512-24	16.35
1/4	20	2.1/2	0.5075	0.2550	0.1910	2	H3	N7	5.10	1.0073	E0251/4	14.35
1/4	20	2.1/2	0.5075	0.2550	0.1910	3	H3	N7	5.10	1.0073	E0251/43FL	14.35
5/16	18	2.23/32	0.5939	0.3180	0.2380	2	H3	F	6.60	1.1891	E0255/16	15.70
5/16	18	2.23/32	0.5939	0.3180	0.2380	3	H3	F	6.60	1.1891	E0255/163FL	15.70
3/8	16	2.15/16	0.6020	0.3810	0.2860	2	H3	5/16	8.00	1.2915	E0253/8	18.65
3/8	16	2.15/16	0.6020	0.3810	0.2860	3	H3	5/16	8.00	1.2915	E0253/83FL	18.65
7/16	14	3.5/32	0.9055	0.3230	0.2420	3	H3	U	9.40	-	E0257/16	31.30
1/2	13	3.3/8	0.9055	0.3670	0.2750	2	H3	27/64	10.80	-	E0251/2	32.10
1/2	13	3.3/8	0.9055	0.3670	0.2750	3	H3	27/64	10.80	-	E0251/23FL	32.10
9/16	12	3.19/32	0.9843	0.4290	0.3220	3	H3	31/64	12.20	-	E0259/16	63.20
5/8	11	3.13/16	0.9843	0.4800	0.3600	3	H3	17/32	13.50	-	E0255/8	71.30
3/4	10	4.1/4	1.1614	0.5900	0.4420	3	H4	21/32	16.50	-	E0253/4	101.00
7/8	9	4.11/16	1.1614	0.6970	0.5230	3	H4	49/64	19.50	-	E0257/8	141.00
1"	8	5.1/8	1.3976	0.8000	0.6000	3	H4	7/8	22.25	-	E0251	172.00